



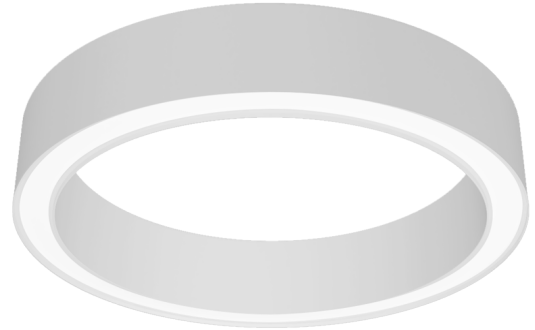

Compass Series | COML-14-D

Date		Notes
Project		
Type	Qty	

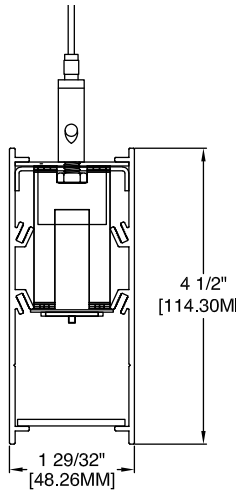

Features

- Custom-rolled extruded aluminum housing.
- LED optimized optics for smooth illumination along entire lens.
- Suspension mount for any ceiling type. Creates architectural rings of light.
- May also be recessed in plaster ceilings (flanged or trimless) and surface mounted.
- High efficiency programmable driver for custom lumen packages. 0-10V dimming to 1% standard.
- High efficacy LEDs in 80 or 90 CRI; two or three channel tunable white; five channel tunable color.

Ordering Guide

MODEL	OPTICS	CCT ¹	LUMENS ²	DIAMETER ³	MOUNTING ⁴	FINISH	OPTIONS
COML-14-D	DP						
COML-14-D Direct	DP = Diffuse Polycarbonate 2 ft., 3 ft., and 4 ft diameters include a one piece lens. All other diameters consist of multiple lenses that match their respective section size and count.	27 = 2700K 80CRI 30 = 3000K 80CRI 35 = 3500K 80CRI 40 = 4000K 80CRI 50 = 5000K 80CRI For 90CRI add '9' prefix. Ex: 940 = 4000K @ 90 CRI TUNABLE WHITE¹ See all options page 4. Please consult factory, not all options available or integral depending upon fixture diameter.	See table page 2 for lumen packages for all diameters. Consult factory for custom lumen packages. All values nominal.	2 = 2 ft 3 = 3 ft 4 = 4 ft 5 = 5 ft 6 = 6 ft 8 = 8 ft 10 = 10 ft 12 = 12 ft 16 = 16 ft 20 = 20 ft	AC = Aircraft Cable PD = Pendant Stem ACM = Mono Point (2'-5' only) S = Surface F = Flange TRL = Trimless	W = White CC = Custom Color AMW = Anti-Microbial White	DIMMING DRIVERS DIM10 = 0-10V (1%) - Standard DIMSR = 0-10V (5.0%) Sensor Ready DIMST = Step Dimming (40%/100%) DALI = DALI (5.0%) LUTRON™ DIMMING DRIVERS LDE1 = Hi-Lume™ 1% EcoSystem™ LDE5 = 5-Series 5% EcoSystem™ L3DA3W = Hi-Lume™ 1% 3-Wire LTEA2W = Hi-Lume 1% 2-Wire 120V SENSORS & CONTROLS ESN = Philips™ EasySense CAS = Casambi Bluetooth control EMERGENCY EMC = Emergency Circuit GTD = Generator Transfer Device EPC4 = 4W Emergency Battery Pack EPC7 = 7W Emergency Battery Pack EPC10 = 10W Emergency Battery Pack EPC12 = 12W Emergency Battery Pack Please consult factory, not all options available or integral depending upon fixture diameter.

¹Tunable white, tunable color and RGB/W options detailed on page 4.

²Delivered Lumens are Standard Output (SO) and Low Output (LO) at 80+CRI 4000K CCT. Use the following multiplier to estimate delivered lumens at other CCTs: 2700K = 0.94, 3000K = 0.96, 3500K = 0.98, 5000K = 1.02. See page 2 for photometry.

³See page 2 for actual dimensions per diameter, and section information.

⁴See page 3 for suspension details.



Size Options & Ordering Instructions

The Compass Series may be ordered in a variety of standard diameters outlined below. Diameters from 2'-5' consist of a single fully welded assembly shipped in a single carton. Diameters of 6'-20' consist of sections that ship as a set in multiple cartons. For all sizes use only the **SIZE ORDER CODE** below. Do not order sections separately.

Mounting Diameters 2'-5' may be ordered with either a 3-into-1 monopoint aircraft assembly or parallel aircraft cables or pendant stems. Diameters 6'-20' may ordered with only parallel aircraft cables or pendant stems. See following page for suspension details. All sizes may also be recessed (flanged or trimless) in plaster ceilings, or surface mounted to any ceiling type.


SIZE ORDER CODE	NOMINAL DIAMETER	ACTUAL DIAMETER	SECTION COUNT	SECTION LENGTH	MOUNTING POINTS	LO LUMENS DIRECT	LO WATTS DIRECT	LO EFFICACY DIRECT	SO LUMENS DIRECT	SO WATTS DIRECT	SO EFFICACY DIRECT
2	2'	23"	1	23"	3	2,395	29	82	3,188	38	84
3	3'	35"	1	35"	3	3,156	47	67	4,678	63	75
4	4'	47"	1	47"	3	4,560	65	70	6,080	87	69
5	5'	60"	1	60"	3	5,551	83	67	7,866	111	70
6	6'	72"	2	72"	4	6,312	99	64	9,356	132	70
8	8'	96"	3	83 1/8"	6	9,120	133	68	12,160	177	68
10	10'	120"	4	84 7/8"	8	11,102	167	65	17,772	223	79
12	12'	144"	6	72"	12	12,624	203	62	18,710	271	69
16	16'	192"	6	96"	12	18,240	282	65	24,320	376	65
20	20'	240"	8	91 7/8"	16	22,204	335	66	31,464	473	66

Standard fully assembled, one-piece housing sizes shown immediately below.


COML-14-D-2'

COML-14-D-3'

COML-14-D-4'

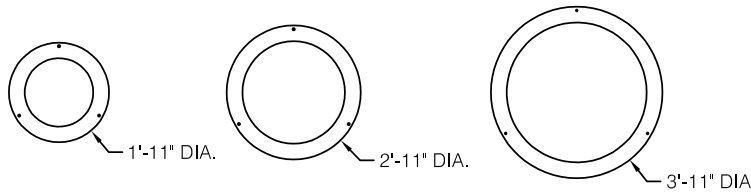


For diameters larger than 5' the section count and length is shown below.

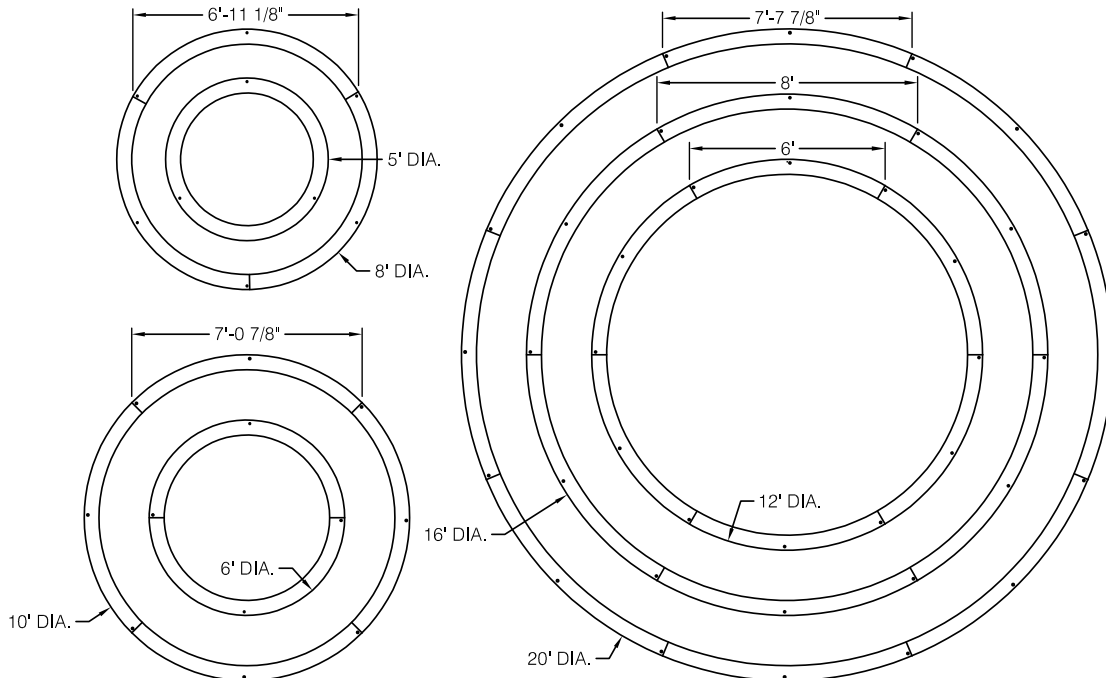


Standard Suspensions

Standard suspension options include adjustable self-locking aircraft cables (AC), a 3-into-1 monopoint (ACM) and rigid pendant stems (PD). AC assembly is 48" x 1/16" with a 5" feed canopy and 2" suspension canopies. 60" 18 gauge power and 22 gauge dimming control SJT feed.


PD assemblies are 5/8" dia. (or 3/8" IP) hollow stem for power feed by others, 24" is standard. Consult factory for longer suspension lengths and other mounting options.



ACM = Mono Point
(2'-5' diameter only)



AC = Aircraft Cable
(All diameters)



PD = Pendant Stem
(All diameters)

Specifications

CONSTRUCTION: Extruded aluminum housing, w/pre-finished steel internal components.

REFLECTOR: Extruded aluminum finished in highly reflective baked white enamel with pre-finished reflective LED tray.

OPTICS: LED optimized diffuse polycarbonate (DP) lens standard.

LED: LED modules in 80/90 CRI @ 3 SDCM, minimum L70= 50,000 hours. Zhaga compliant, field replaceable.

DRIVER: Standard driver is Class 2 AOC 0-10V to 1%, 120/277V input, PF > 90%, THD < 20 @ 120V. Additional dimming protocols available. All drivers prewired from factory for connection to control system (by others). Field replaceable.

MOUNTING: Standard options include adjustable self-locking aircraft cables (AC), 3-into-1 monopoint (ACM) and rigid pendant stems (PD). AC assembly is 48" x 1/16" with a 5" feed canopy and 2" suspension canopies. 18 gauge power and 22 gauge dimming control SJT feed. May also be recessed (flanged or trimless) in plaster ceilings, or surface mounted to any ceiling type.

FINISH: Housing and components finished in baked white enamel. Canopies and pendant stems are white enamel unless otherwise specified.

CERTIFICATION Luminaires are cETLus listed conforming to UL STD. 1598 and certified to CSA STD C22.2 NO. 250.0. Suitable for dry & damp locations. Union Made in the United States of America. I.B.E.W. RoHS compliant.

Day-O-Lite offers a variety of tunable white and tunable color options for a range of human centric applications and budgets. It is recommended that a recognized authority on the benefits and best practices of tunable white be consulted prior to specification. As a rule, fewer channels will provide a basic level of performance for budget conscious applications. Conversely, an increased number of channels, a wider CCT range, higher CRI and more precise color consistency may be more appropriate depending on the application and desired results.

HOW TO SPECIFY

Select from the various channel/control options below and insert desired **Ordering Code** into the **COLOR TEMP** column of the Ordering Guide on page 1. No need to add a dimming option as the codes include the chosen protocol.

2-CHANNEL TUNABLE WHITE OPTIONS

- 2700K - 6500K CCT range
- 1000L/ft LED modules @ 4000K
- 80+ CRI w/3SDCM color accuracy
- 10W/ft. nominal power

Ordering Codes

- 2DIM10** for 0-10V control
- 2DALI** for DALI control
- 2DMX** for DMX control
- 2PSQ** for Lutron Quantum control
- 2SNS** for control via Signify SNS sensors
- 2CAS** for control via Casambi BLE wireless devices

LEGRAND BLANCO MULTI-CHANNEL OPTIONS

Blanco-2

Blanco-2 mixes two channels of white LEDs to approximate the blackbody curve for tunable white applications. CCT and intensity may be adjusted with controls by others.

- 3000K-5000K CCT range
- 1000L/ft LED modules @ 4000K
- 90+ CRI w/2SDCM color accuracy
- 10W/ft. nominal power

Ordering Codes

- B2DLM** for DLM control

Blanco-3

Blanco-3 mixes three channels of white LEDs across a wider range of color temperatures for more demanding tunable white applications. CCT and intensity may be adjusted with controls by others.

- 2700K-6500K CCT range
- 1000L/ft. LED modules @ 4000K
- 90+ CRI w/2SDCM color accuracy
- 10W/ft. nominal power

Ordering Codes

- B3DLM** for DLM control

RGB & RGBW TUNABLE COLOR

- RGB = Red, Green, Blue color mixing LEDs
- RGBW = Red, Green, Blue + White of chosen CCT
- Dimming form 100% to 1%.
- 90+ CRI w/3SDCM color accuracy
- 10W/ft. nominal power

Notes:

- RGB requires an RGB DMX or DALI controller (by others)
- RGBW requires an RGBW DMX or DALI controller (by others)
- All channels on one driver is standard, if isolating the White from the RGB channels is desired please consult factory.
- RGB and RGBW are not recommended for tunable white applications.

Ordering Codes

- RGB** for DMX control
- RGB27** for DMX control w/2700K white
- RGB30** for DMX control w/3000K white
- RGB35** for DMX control w/3500K white
- RGB40** for DMX control w/4000K white
- RGB50** for DMX control w/5000K white
- RGB65** for DMX control w/6500K white
- Add Suffix **DAL** for DALI control to codes above.

5-CHANNEL TUNABLE WHITE AND COLOR

- RGBWW = Red, Green, Blue, Warm White, Cool White.
- Consult factory for RGBWW tunable white/color options.

¹Please consult factory, not all options available or integral depending upon fixture diameter.
Day-O-Lite makes no claims as to the psychological or physiological efficacy of the white color tuning options offered herein.