

NASL-RND FLANGED FIXTURE INSTALLATION



RISK OF ELECTRICAL SHOCK. DISCONNECT POWER BEFORE INSTALLATION OR SERVICING.



TO BE INSTALLED BY A QUALIFIED ELECTRICIAN IN ACCORDANCE TO LOCAL & NATIONAL ELECTRIC CODES.




FAILURE TO COMPLY TO INSTRUCTIONS & FORMENTIONED WARNINGS COULD VOID PRODUCT WARRANTY




CEILING TO BE PROPERLY REINFORCED TO SUPPORT WEIGHT OF THE FIXTURE.




MUST INSTALL PRIOR TO CEILING.

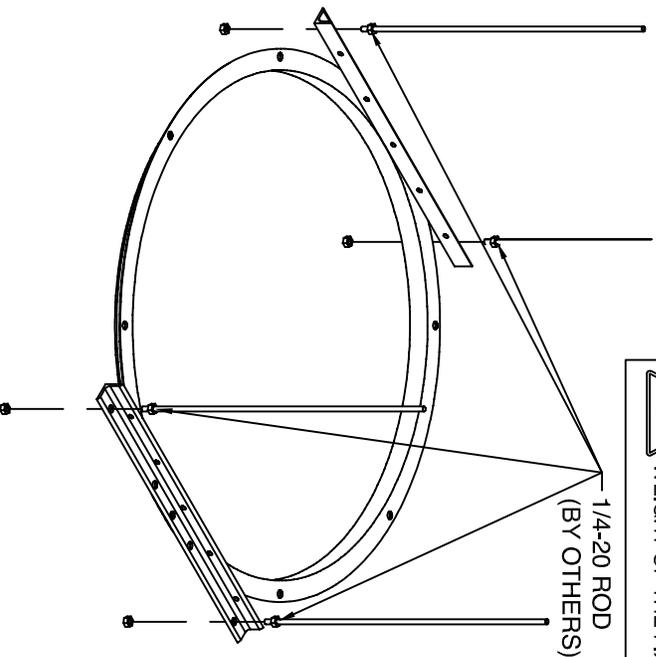


1

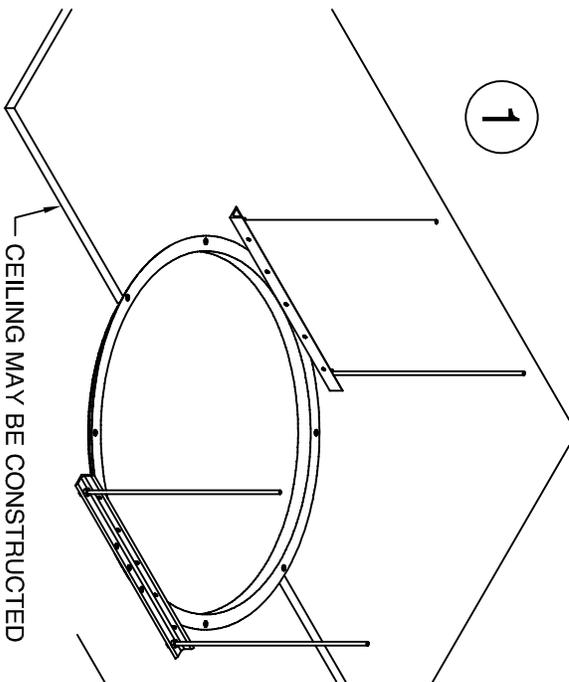

2

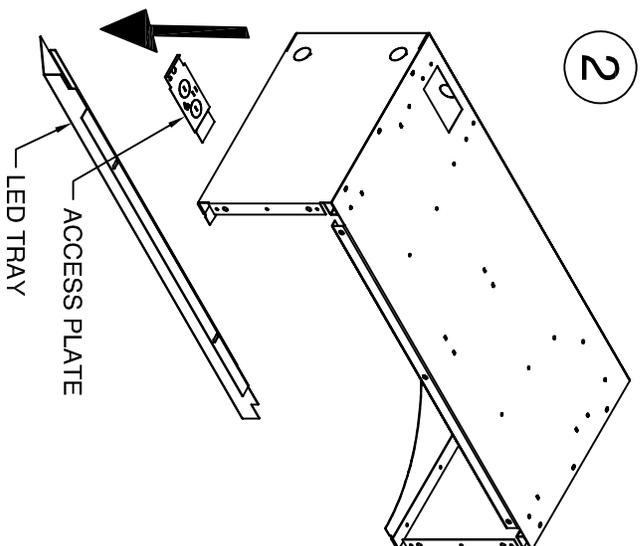

3

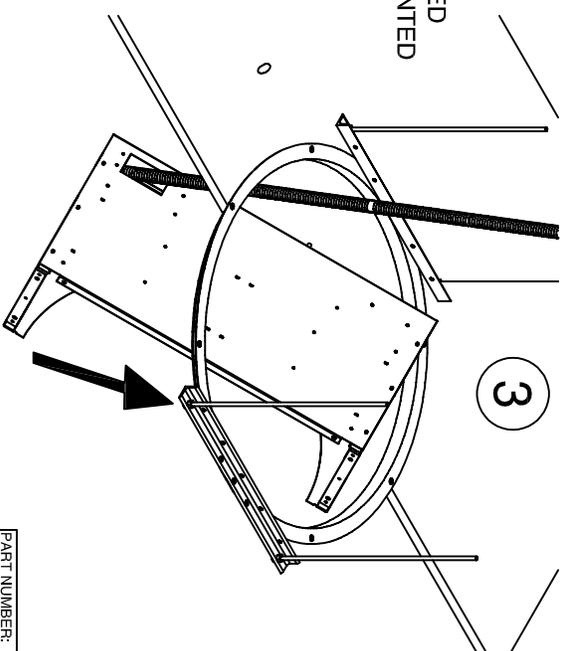

1. INSTALL PLASTER FRAME AT REQUIRED MOUNTING HEIGHT USING 1/4-20 RODS (BY OTHERS). **PLASTER FRAME MUST BE INSTALLED PRIOR TO CEILING.** AFTER PLASTER FRAME HAS BEEN INSTALLED, CEILING MAY BE CONSTRUCTED AROUND RING.

2. FIXTURE HOUSING IS SHIPPED AS TWO PIECES TO FIT THROUGH PLASTER FRAME OPENING. REMOVE LED TRAY AND ACCESS PLATE IN FIXTURE HALF WHERE FEED LOCATION IS TO BE INSTALLED.

3. INSERT EACH HALF OF FIXTURE THROUGH RING AND SECURE TOGETHER USING SUPPLIED HARDWARE. SECURE TO PLASTER RING USING SUPPLIED HARDWARE. **MAKE SURE SUPPLY WIRES ARE FED THROUGH HOUSING AS IT IS INSTALLED.**

4. CONNECT SUPPLY WIRES AND FIXTURE WIRES USING APPROPRIATE CONNECTOR PER LOCAL ELECTRICAL CODES. INSTALL APPROPRIATE STRAIN RELIEF PER LOCAL ELECTRICAL CODES. STANDARD WIRING DIAGRAM SHOWN, REFER TO JOB DRAWINGS FOR JOB SPECIFIC WIRING

5. REINSTALL ACCESS PLATE AND LED TRAY AFTER ALL WIRING CONNECTIONS ARE MADE.

6. INSTALL LENS TRIM RING AND LENS USING SUPPLIED HARDWARE. **MAKE SURE TETHER IS SECURED TO BOTH LENS RING AND FIXTURE HOUSING**

MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN. DISCONNECT POWER DURING INSTALLATION/SERVICING. ROW CONFIGURATION IS JOB SPECIFIC. CONSULT SHOP DRAWINGS BEFORE CONSTRUCTING ROWS. STANDARD OPTIONS/SIZES SHOWN. OTHER OPTIONS AVAILABLE WITH SIMILAIR INSTALLATION. BE SURE TO UNDERSTAND ALL PROCEDURES PRIOR TO INSTALLATION. IMPORTANT: THE NATIONAL ELECTRIC CODE REQUIRES THAT ANY FIXTURE IN EXCESS OF 50 POUNDS MUST BE INDEPENDENTLY SUPPORTED OF THE OUTLET BOX. DAY-O-LITE IS NOT RESPONSIBLE FOR INADEQUATE REINFORCEMENT OF STRUCTURAL SUPPORT SYSTEMS. DAY-O-LITE RESERVES THE RIGHT TO MAKE ANY MECHANICAL OR MATERIAL CHANGES TO THE FIXTURES WHICH DO NOT AFFECT THE APPEARANCE OR PERFORMANCE. THIS PRINT IS THE PROPERTY OF DAY-O-LITE AND THE INFORMATION IT CONTAINS MAY NOT BE USED WITHOUT WRITTEN CONSENT OF DAY-O-LITE.

MODEL NO.: NASL-RND----	PAGE: SHEET 1 OF 2	PART NUMBER: 970041A0
CONTRACT INFORMATION: 128 Chestnut Street, Warwick, RI 02888 Tel. (401) 467-8232 Fax. (401) 941-2960 E-mail: sales@dayville.com WWW: http://www.dayville.com		
		ISSUED ON: 10/31/19
		DAY-O-LITE Lighting Without Limits

NASL-RND FLANGED FIXTURE INSTALLATION



RISK OF ELECTRICAL SHOCK. DISCONNECT POWER BEFORE INSTALLATION OR SERVICING.



TO BE INSTALLED BY A QUALIFIED ELECTRICIAN IN ACCORDANCE TO LOCAL & NATIONAL ELECTRIC CODES.



DO NOT CONNECT, MODIFY, SPLICE, OR TAP ANY WIRED CONNECTIONS UNDER POWER.

1. INSTALL PLASTER FRAME AT REQUIRED MOUNTING HEIGHT USING 1/4-20 RODS (BY OTHERS). **PLASTER FRAME MUST BE INSTALLED PRIOR TO CEILING.** AFTER PLASTER FRAME HAS BEEN INSTALLED, CEILING MAY BE CONSTRUCTED AROUND RING.




2. FIXTURE HOUSING IS SHIPPED AS TWO PIECES TO FIT THROUGH PLASTER FRAME OPENING. REMOVE LED TRAY AND ACCESS PLATE IN FIXTURE HALF WHERE FEED LOCATION IS TO BE INSTALLED.

3. INSERT EACH HALF OF FIXTURE THROUGH RING AND SECURE TOGETHER USING SUPPLIED HARDWARE. **MAKE SURE SUPPLY WIRES ARE FED THROUGH HOUSING AS IT IS INSTALLED.**

4. CONNECT SUPPLY WIRES AND FIXTURE WIRES USING APPROPRIATE CONNECTOR PER LOCAL ELECTRICAL CODES. INSTALL APPROPRIATE STRAIN RELIEF PER LOCAL ELECTRICAL CODES. STANDARD WIRING DIAGRAM SHOWN, REFER TO JOB DRAWINGS FOR JOB SPECIFIC WIRING

5. REINSTALL ACCESS PLATE AND LED TRAY AFTER ALL WIRING CONNECTIONS ARE MADE.

6. INSTALL LENS TRIM RING AND LENS USING SUPPLIED HARDWARE. **MAKE SURE TETHER IS SECURED TO BOTH LENS RING AND FIXTURE HOUSING**

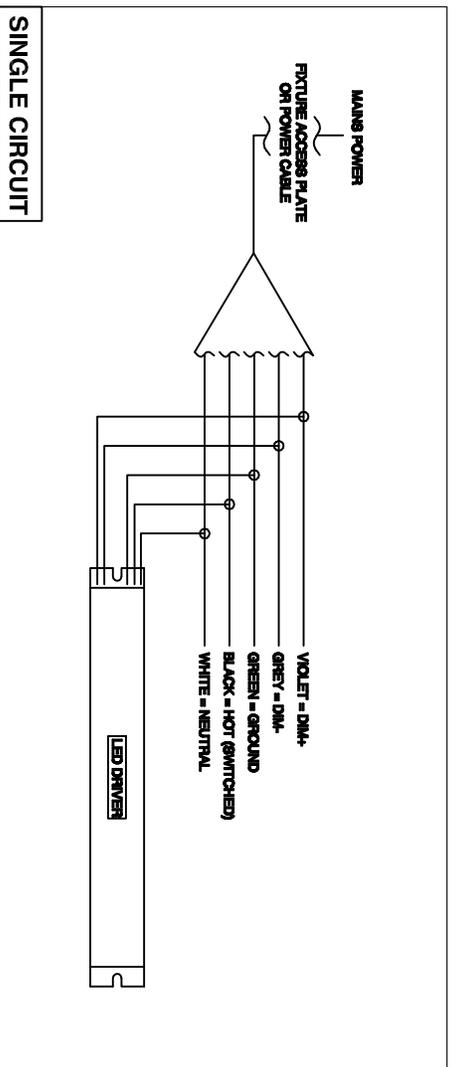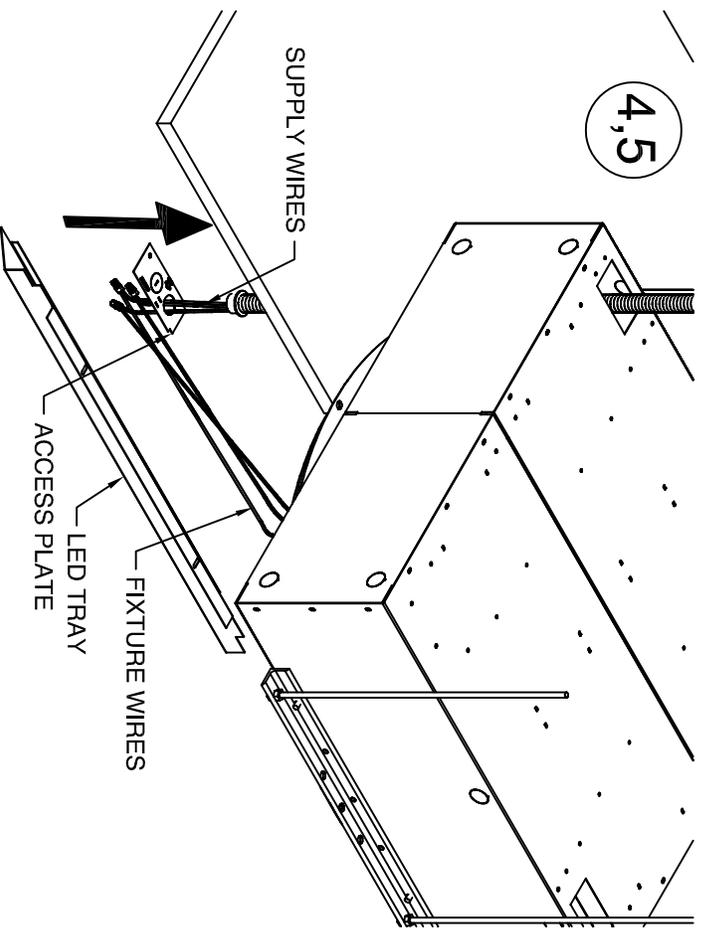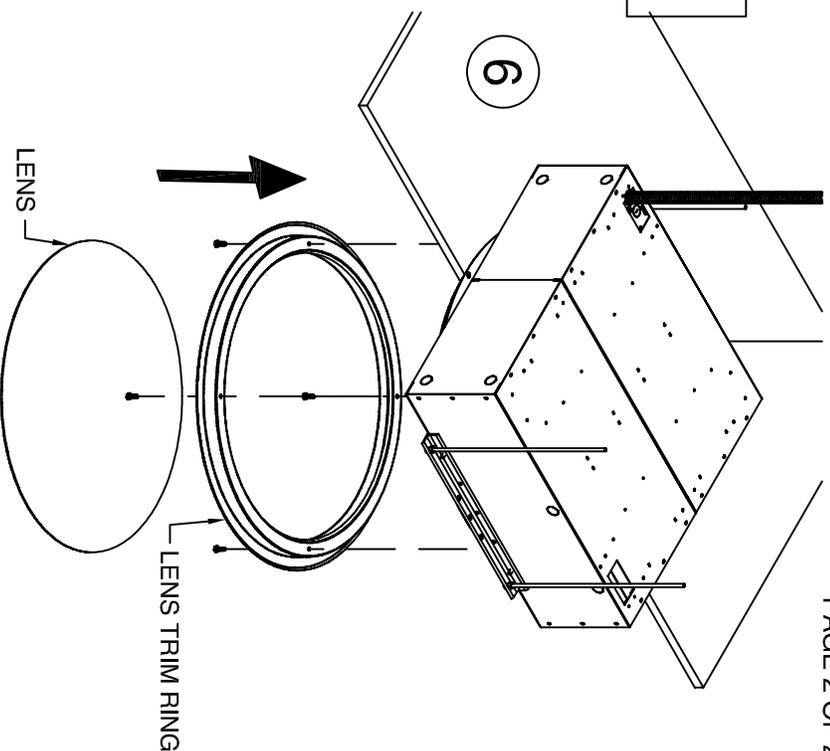

MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN. DISCONNECT POWER DURING INSTALLATION/SERVICING. ROW CONFIGURATION IS JOB SPECIFIC. CONSULT SHOP DRAWINGS BEFORE CONSTRUCTING ROWS. STANDARD OPTIONS/SIZES SHOWN. OTHER OPTIONS AVAILABLE WITH SIMILAR INSTALLATION. BE SURE TO UNDERSTAND ALL PROCEDURES PRIOR TO INSTALLATION. IMPORTANT: THE NATIONAL ELECTRIC CODE REQUIRES THAT ANY FIXTURE IN EXCESS OF 50 POUNDS MUST BE INDEPENDENTLY SUPPORTED BY THE OUTLET BOX. DAY-O-LITE IS NOT RESPONSIBLE FOR INADEQUATE REINFORCEMENT OF STRUCTURAL SUPPORT SYSTEMS. DAY-O-LITE RESERVES THE RIGHT TO MAKE ANY MECHANICAL OR MATERIAL CHANGES TO THE FIXTURES WHICH DO NOT AFFECT THE APPEARANCE OR PERFORMANCE. THIS PRINT IS THE PROPERTY OF DAY-O-LITE AND THE INFORMATION IT CONTAINS MAY NOT BE USED WITHOUT WRITTEN CONSENT OF DAY-O-LITE.

MODEL NO.:

NASL-RND----

PAGE:

SHEET 2 OF 2 10/31/19

PART NUMBER:
970041A0

CONTRACT INFORMATION:

126 Chestnut Street, Warwick, RI 02888
Tel. (401) 467-8292 | Fax. (401) 941-2960
E-mail: sales@dayolite.com
WWW: http://www.dayolite.com

DAY-O-LITE
Lighting Without Limits