



SKLL-1-1X2/2X2/2X4-FLANGE-INSTALLATION

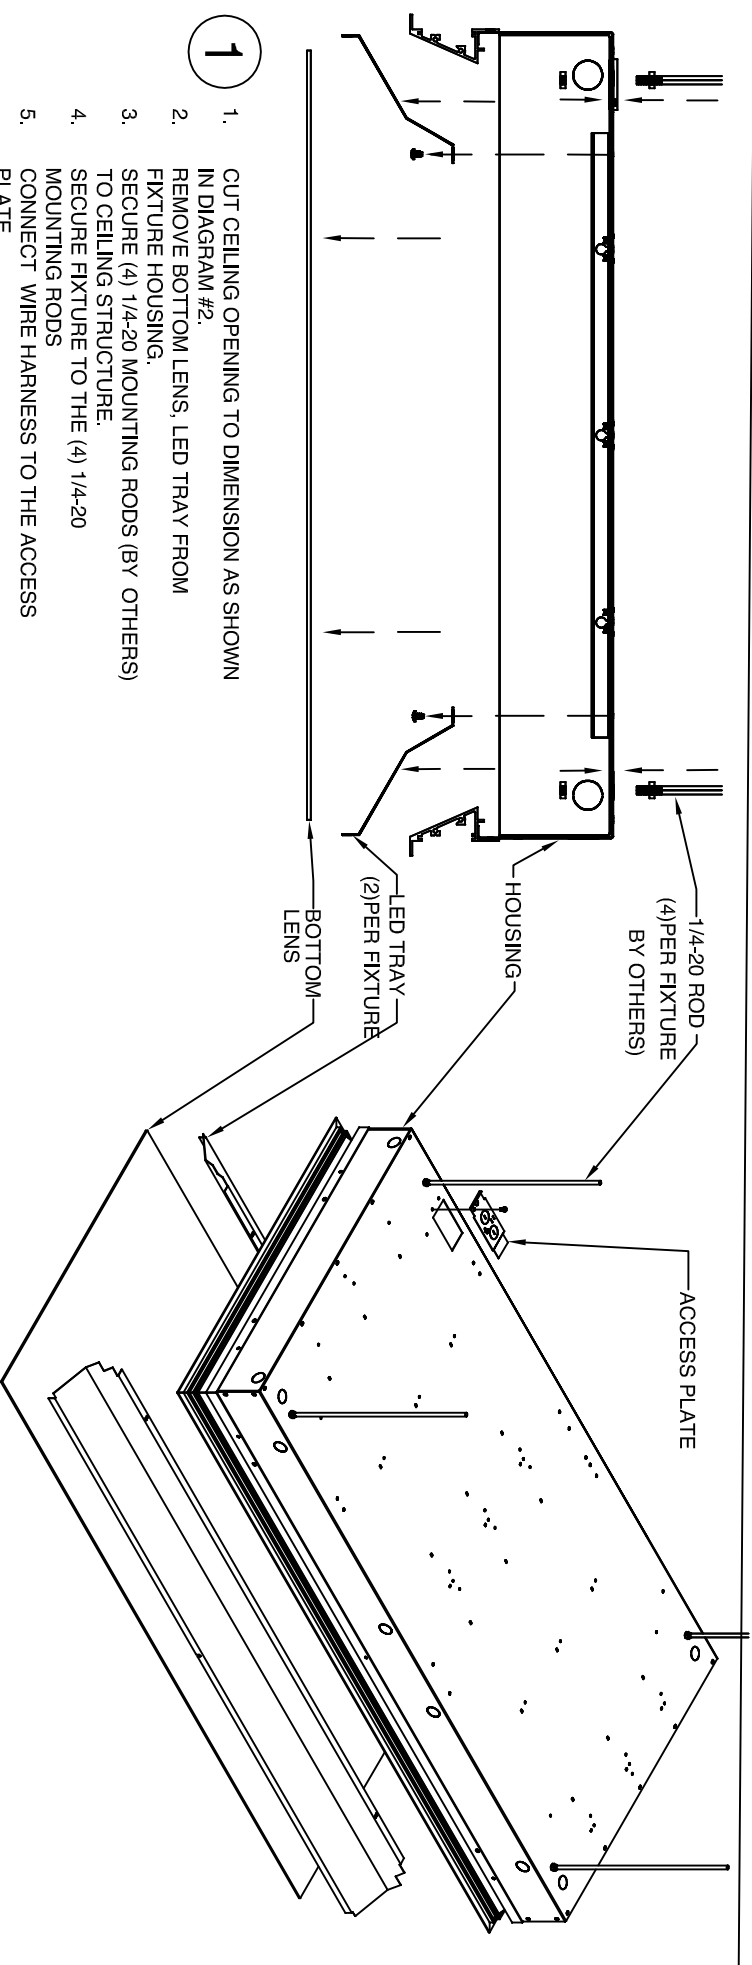

1. CUT CEILING OPENING TO DIMENSION AS SHOWN IN DIAGRAM #2.
2. REMOVE BOTTOM LENS, LED TRAY FROM FIXTURE HOUSING.
3. SECURE (4) 1/4-20 MOUNTING RODS (BY OTHERS) TO CEILING STRUCTURE.
4. SECURE FIXTURE TO THE (4) 1/4-20 MOUNTING RODS
5. CONNECT WIRE HARNESS TO THE ACCESS PLATE

2

AFTER COMPLETE INSTALL , REINSTALL BACK BOTTOM LENS & LED TRAY.

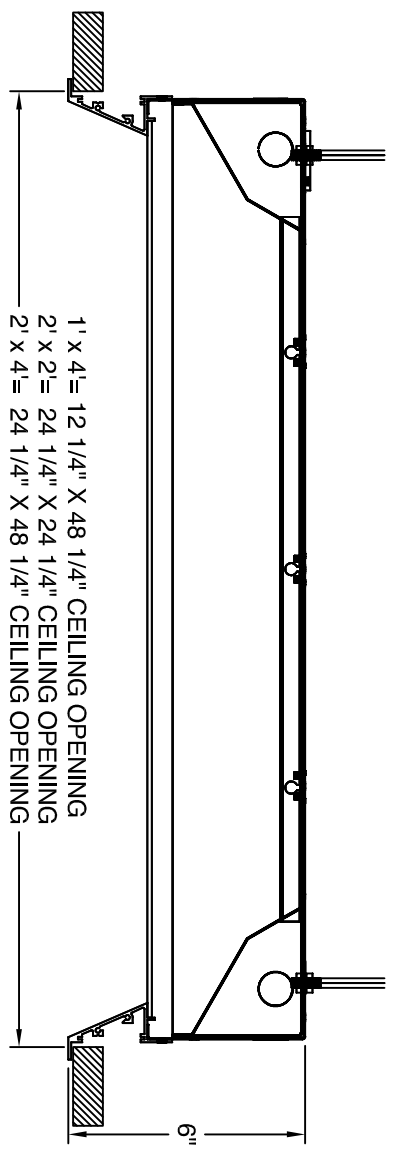

MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN. DISCONNECT POWER DURING INSTALLATION/SERVICING. ROW CONFIGURATION IS JOB SPECIFIC. CONSULT SHOP DRAWINGS BEFORE CONSTRUCTING ROWS. STANDARD OPTIONS/SIZES SHOWN. OTHER OPTIONS AVAILABLE WITH SIMILAR INSTALLATION. BE SURE TO UNDERSTAND ALL PROCEDURES PRIOR TO INSTALLATION. IMPORTANT: THE NATIONAL ELECTRIC CODE REQUIRES THAT ANY FIXTURE IN EXCESS OF 50 POUNDS MUST BE INDEPENDENTLY SUPPORTED OF THE OUTLET BOX. DAY-O-LITE IS NOT RESPONSIBLE FOR INADEQUATE REINFORCEMENT OF STRUCTURAL SUPPORT SYSTEMS. DAY-O-LITE RESERVES THE RIGHT TO MAKE ANY MECHANICAL OR MATERIAL CHANGES TO THE FIXTURES WHICH DO NOT AFFECT THE APPEARANCE OR PERFORMANCE. THIS PRINT IS THE PROPERTY OF DAY-O-LITE AND THE INFORMATION IT CONTAINS MAY NOT BE USED WITHOUT WRITTEN CONSENT OF DAY-O-LITE.

MODEL NO.: SKLL-1-1X4/2X2/2X4-F-INSTALL.
 CONTRACT INFORMATION: 126 Chestnut Street, Warwick, RI 02888
 Tel: (401) 467-8232 | Fax: (401) 941-2960
 E-mail: sales@dayolite.com
 WWW: http://www.dayolite.com

PAGE: SHEET 1 OF 1
 ISSUED ON: 9/3/2019
DAY-O-LITE
 Lighting Without Limits

PART NUMBER: 970031A0